

Ford F-Series Underseat Locker Installation Instructions

Tools Required for Installation:

- Impact driver or ratchet wrench
- 7/16" or 11mm socket
- 1/2" or 13mm socket
- 1/2" or 13mm wrench

Included Hardware and Accessories:

- (2 ct.) 1/4"-20 Nyloc nuts
- (2 ct.) 5/8" bolts
- (2 ct.) 5/8" nuts
- (2 ct.) 5/8" lock washers
- (4 ct.) 5/8" flat washers
- (2 ct.) Keys


Install Video:




Step 1: Place loose mounting plate to the studs on the mounting bracket and thread on the 2 Nyloc nuts (Fig. 1). Tighten with the 7/16" socket (Fig. 2).




Step 2: Lift rear seats on both passenger and driver's side, place the locker in the truck, and line up both brackets with the holes on the seat mounts (Figs. 3 & 4).

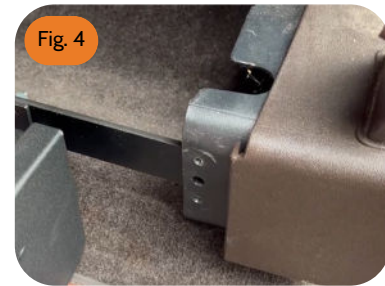

Step 3: Place one flat washer on the bolt and thread it through both holes from the outside. Add the other flat washer, lock washer, and nut on the inside of the brackets (Figs. 5 & 6).

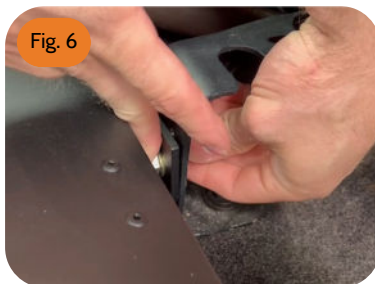

Step 4: Adjust to the desired position of the locker, then tighten the bolts on both brackets (Figs. 7 & 8).

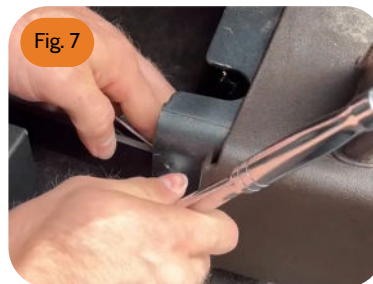

Step 5: Ensure that the locker does not interfere with the seats (Fig. 9) or when opening and closing (Fig. 10). If it interferes, adjust angle or height as needed.



Thank you for choosing GearLok! Your satisfaction is our top priority. We'd love to hear about your experience. Scan the QR code to share an honest review. For any questions or concerns, reach us at support@gearlok.com.

